



## Hinge 106°, 5/8" Overlay, Dowels, 3-Way Cam

**Part Number: SCSR3599XR**

Salice Face Frame Hinge 106°, 5/8" Overlay, Dowels, 3-Way Cam

Salice Face Frame Hinge 106°, 5/8" Overlay, Screw-On, with 3-way Cam Adjustments

|                      |                                  |
|----------------------|----------------------------------|
| Adjustment Type      | 3-Way Cam Adjustment             |
| Angle                | 106                              |
| Application Type     | Face Frame                       |
| Closing Type         | Self-Close                       |
| Door Type            | Face Frame                       |
| Finish               | Nickel                           |
| Hinge Cup Depth      | 11                               |
| Hinge Cup diameter   | 35 mm                            |
| Hinge Door Thickness | Up to 3/4" Thick                 |
| Hinge Type           | Integrated Winged Mounting Plate |
| Mounting Type        | Dowels                           |
| Overlay              | 5/8 in                           |

### Product Description

Salice Excentthree Face Frame hinges enable easy and simple installation while combined with their superior technical features ensuring that you receive a reliable and consistent door action. These low-profile, one-piece face frame hinges provide eccentric cams for three way adjustments, including side-to-side, up-down, and in-and-out, providing you with perfect alignment. Available in both screw-on and doweled versions, they will enable long-lasting attachment to the frame with superior stability and zero door protrusion. Expect a lifetime of smooth opening and closing in your kitchen when you pick Salice.


### Product Advantages

- Salice provides a lifetime warranty
- Precise door alignment
- Zero door protrusion
- Boring pattern same as the industry standard



---

## Technical Documents

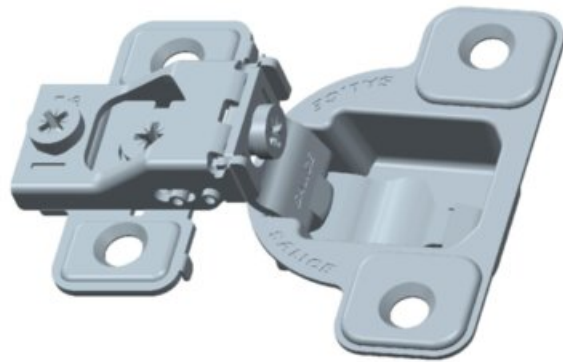

View this product online at <https://marathonhardware.com/pd/SCSR3599XR>



---

## Technical Documents



View this product online at <https://marathonhardware.com/pd/SCSR3599XR>

## Technical Documents



# SALICE



### hinges

automatic closing / face frame hinge / standard applications



Stamped steel.  
Cup depth 11 mm (7/16").  
Opening 106° degrees.  
Drilling distance (K) fixed at 2.5 mm (3/32").  
Gap between door and frame (L) = 4.6 mm.



For overlays from 1/2" through 3/4" the "A" value (Reveal) = 8.3 mm for (21/64") square edge doors at 90° opening.

For overlays from 1" through 1-7/16" the "A" value (Reveal) = 5.2 mm for (3/4") square edge doors at 90° opening.

**ARTURO SALICE S.p.A.** (Incorporated in Italy)  
Via Provinciale Novaresa, 10  
22060 NOVARATE (COMO) ITALIA  
TEL. 031 760424  
FAX 031 771608  
info.salice@salice.com

www.salice.com  
CAPITAL SOC. € 28.000.000 I.V.  
S.P.A. P.A. 00211600330  
REG. IMPRESSE COMO 00211600330  
RCA COMO 1790168

**DEUTSCHE SALICE GmbH**  
TALBURG WERKZEUGEINGEBOUE  
www.salice.de  
**SALICE UK Ltd.**  
HUNTINGDON CAMBS PE28 6PN  
www.saliceuk.co.uk

**SALICE FRANCE S.A.R.L.**  
DESIGN ARTISAN  
www.salicefrance.com  
**SALICE CANADA Inc.**  
MISSISSAUGA, ONTARIO L4X 1P1  
www.salicecanada.com

**SALICE AMERICA Inc.**  
CHARLOTTE NC 28227  
www.saliceamerica.com  
**SALICE ESPAÑA, S.L.**  
GRAN VÍA DE LA LEY  
www.saliceespana.es

View this product online at <https://marathonhardware.com/pd/SCSR3599XR>

