DS10 Undermount

Product Features

- 4-Way Clip provides for Height and Lateral Side Adjustment
- Height Adjustment ranges from 0mm to 3mm
- Lateral Side Adjustment ranges from ±1.5mm
- 6-Way Clip (optional) enables Depth Adjustment from 0-3mm
- Tool free assembly and removal of drawer.
- Silent system guarantees smooth run without noise.
- Load Capacity of 40kg (88lbs)

Standard Drawer Kit (packaged as a complete set)

- Includes 1 set of undermount slides
- All DTC slides include front 4-Way locking clips.
- Screw kit

4-Way Clip   6-Way Clip
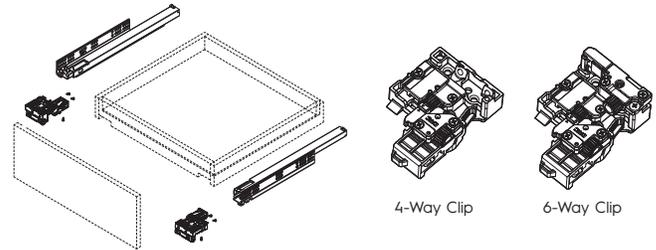
DS10 Undermount Ordering Guide

Length (mm/Inch)	Matte Grey	Set/Box
250mm (10")	105-DS10-250	10
270mm (11")	105-DS10-270	10
300mm (12")	105-DS10-300	10
350mm (14")	105-DS10-350	10
400mm (16")	105-DS10-400	10
450mm (18")	105-DS10-450	10
500mm (20")	105-DS10-500	10
550mm (22")	105-DS10-550	10
600mm (24")	105-DS10-600	10

DS10 Undermount Locking Clips Ordering Guide

Description	Part#	Set/Box
4-Way Adjustable locking clips	105-ODSD4-DS10H	50
6-Way Adjustable locking clips	105-ODSD6-DS10H	50

Space Requirements
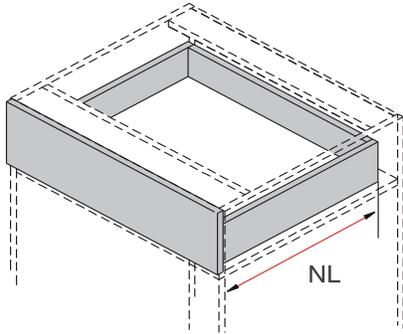
NL:Nominal length

Overlay Installation Dimensions

LT
NL
NL−10
37
4
DTC
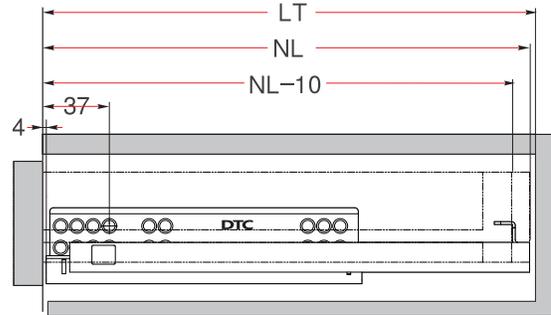
Inset Installation Dimensions

NL−10+X
37
22
X
DTC
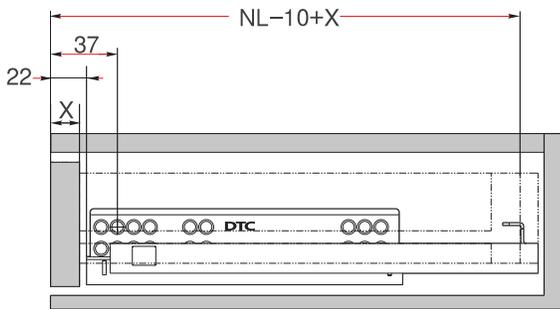
Drilling Pattern

Cabinet edge

9 9 9

DTC 250 L
DTC 270 L
DTC 300 L
DTC 350 L
DTC 400 L
DTC 450 L
DTC 500 L
DTC 550 L
DTC 600 L

32
96
128
160
192
224
23 78
37
Fourth hole

Installation Dimensions

SKW=LW−42
Max 16
Min 6
Max 13
Min26.5
12
21
37
LW
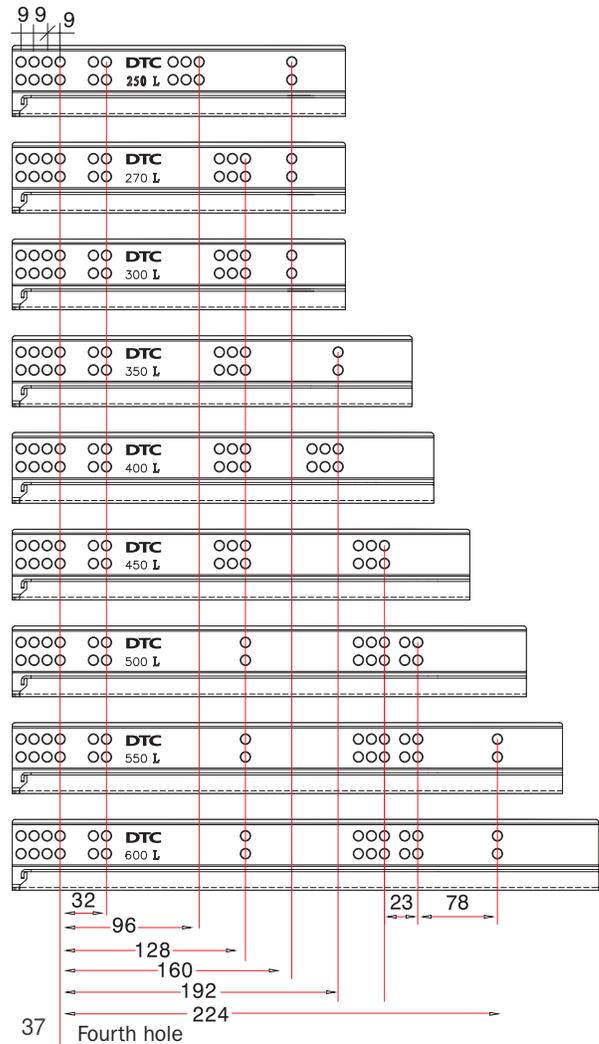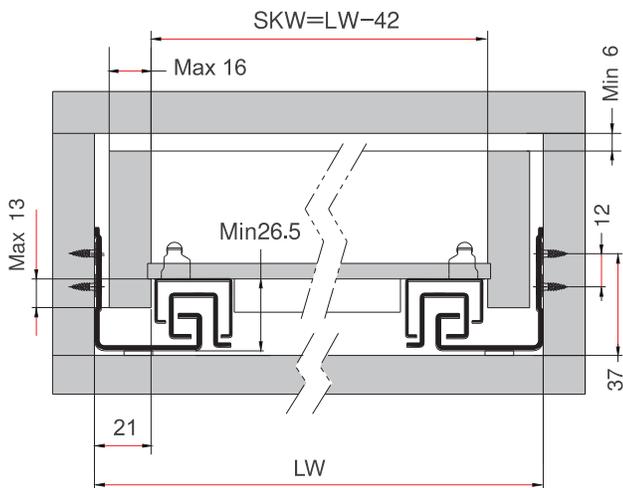
Back Assembly

2D Locking Clip Assembly

3D Locking Clip Assembly

Drawer Back Preparation (mm)

Max 13
11
10
Ø6
7
33

70° Min55 16

70° Min55 16
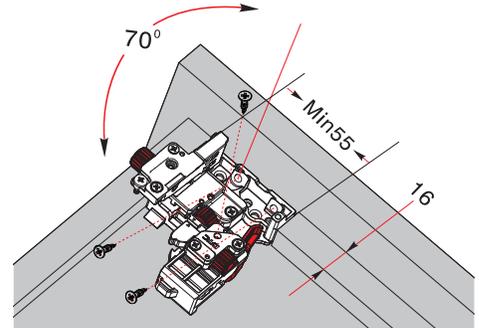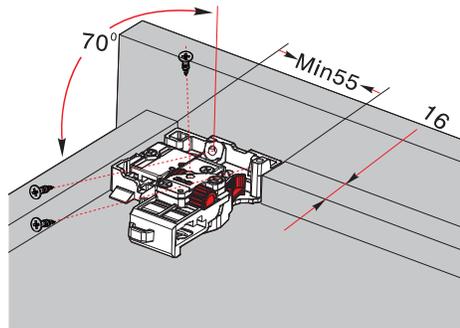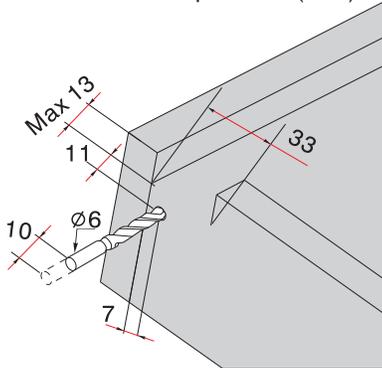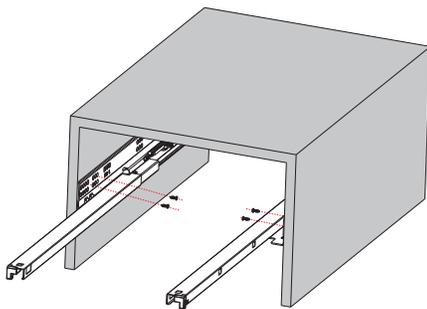
Drawer Assembly

Fix the slides onto the cabinet.
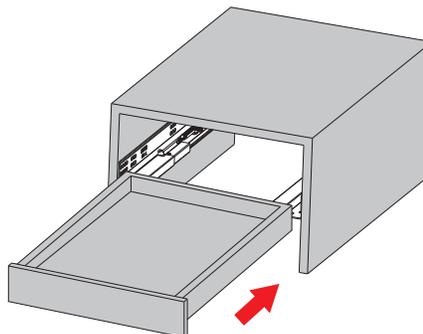
Lay the drawer bottom onto the slide then push the drawer into the cabinet
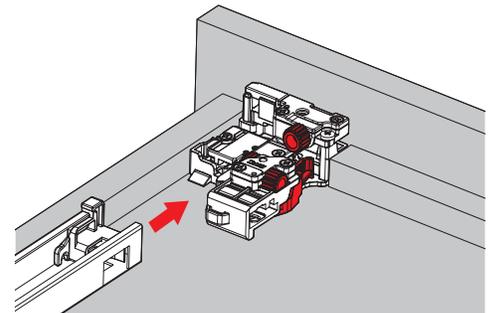
Slides should click into place, if not will have to be adjusted from the bottom.

4-Way Drawer Assembly Adjustment
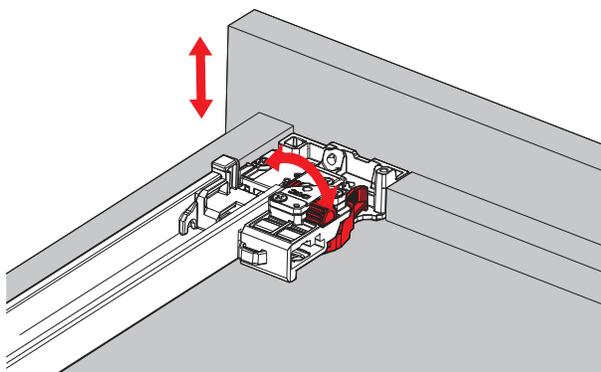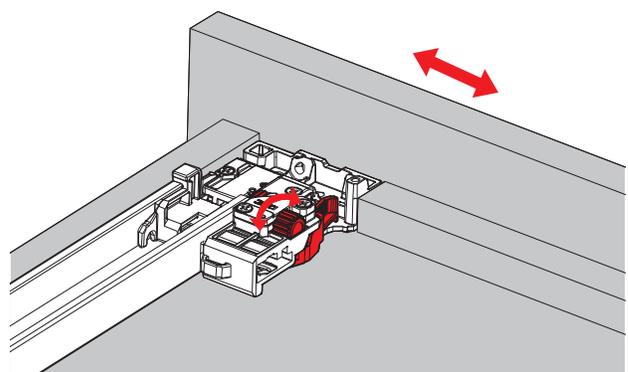
Up & Down Adjustment

Side to Side Adjustment

6-Way Drawer Assembly Adjustment
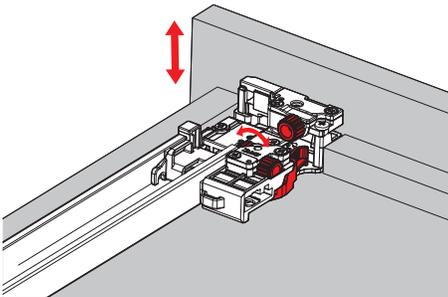
Up & Down Adjustment
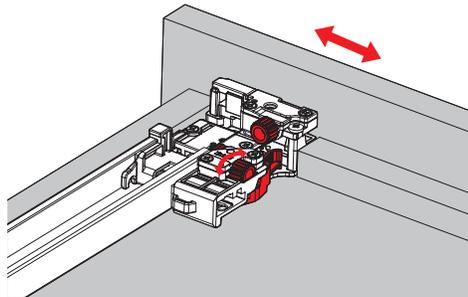
Side to Side Adjustment
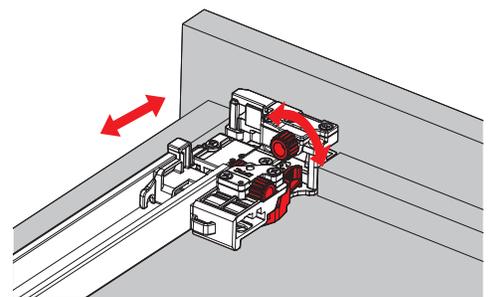
Depth Adjustment

Drawer Removal
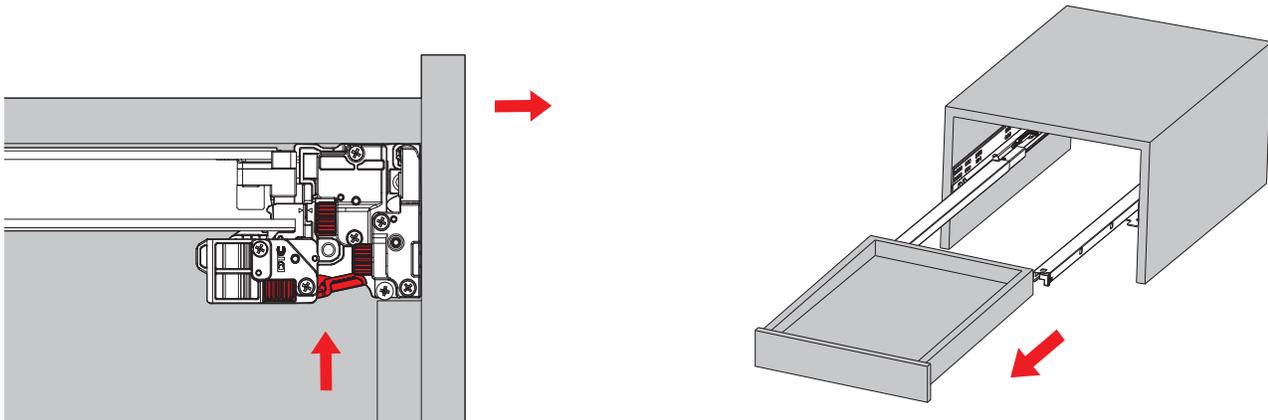
For Removal, Hold the Handle and pull out the drawer