


sliding systems coplanar

slider_m50

Coplanar movement

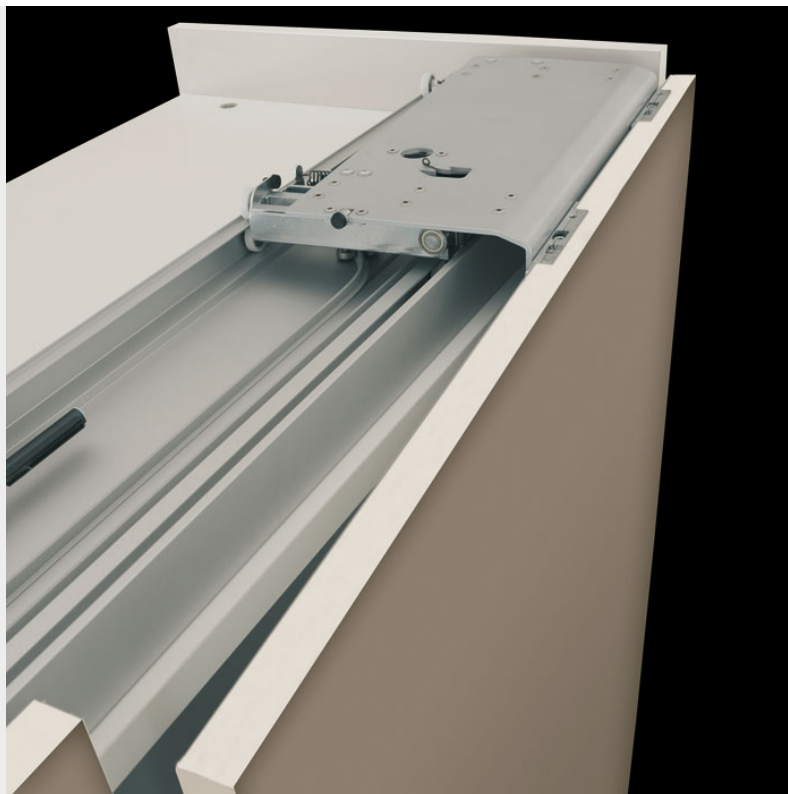

Coplanar sliding system for two-door units with a weight up to 50 kg, decelerated opening and closing.

- Coplanar two-door mechanism.
- Decelerated opening and closing.
- Maximum door load: 50kg.
- Door width: minimum 800mm, maximum 2,000mm.
- Maximum door height: 3,000mm.
- Distance of the door from the bottom edge of the base panel: 33/17mm.

RECESSED ADJUSTERS:

- Door thickness: min. 18mm; door+handle thickness: 45mm.

SURFACE-MOUNTED ADJUSTERS:

- Door thickness: min. 18mm; door+handle thickness: 40mm.
- Vertical door adjustment: ± 5 mm.
- Horizontal door adjustment: ± 3.5 mm.
- Weight-bearing upper track fitted to the top panel of the unit with side clips and screws.
- Lower track fitted under the base panel of the unit with side clips and screws.
- Can be adapted for cupboards up to 200mm wider.
- Compatible with Clipper frames.





SALICE



- Front levelling feet.

ARTURO SALICE S.p.A. (Società con Unico Socio)

VIA PROVINCIALE NOVEDRATESE, 10
22060 NOVEDRATE (COMO) ITALIA
TEL. 031 790424
FAX 031 791508
info.salice@salice.com

www.salice.com
CAPITALE SOC. € 25.000.000 I.V.
C.F. e P. IVA 00211650130
REG. IMPRESE COMO 00211650130
REA COMO N° 96189

DEUTSCHE SALICE GmbH
74382 NECKARWESTHEIM
www.deutschesalice.de

SALICE UK Ltd.
HUNTINGDON CAMBS PE29 6FN
www.saliceuk.co.uk

SALICE FRANCE S.A.R.L.
06600 ANTIBES
www.salicefrance.com

SALICE CANADA Inc.
MISSISSAUGA, ONTARIO L5L 5Y1
www.salicecanada.com

SALICE AMERICA Inc.
CHARLOTTE NC 28227
www.saliceamerica.com

SALICE ESPAÑA, S.L.U.
08403 GRANOLLERS
www.saliceespana.es